


# SPECIFICATIONS



**Model Number:** GL24K3  
**Part Number:** 19039151A

**Rev:** 01  
**Sep 22, 2017**

## Mechanical Drawing:

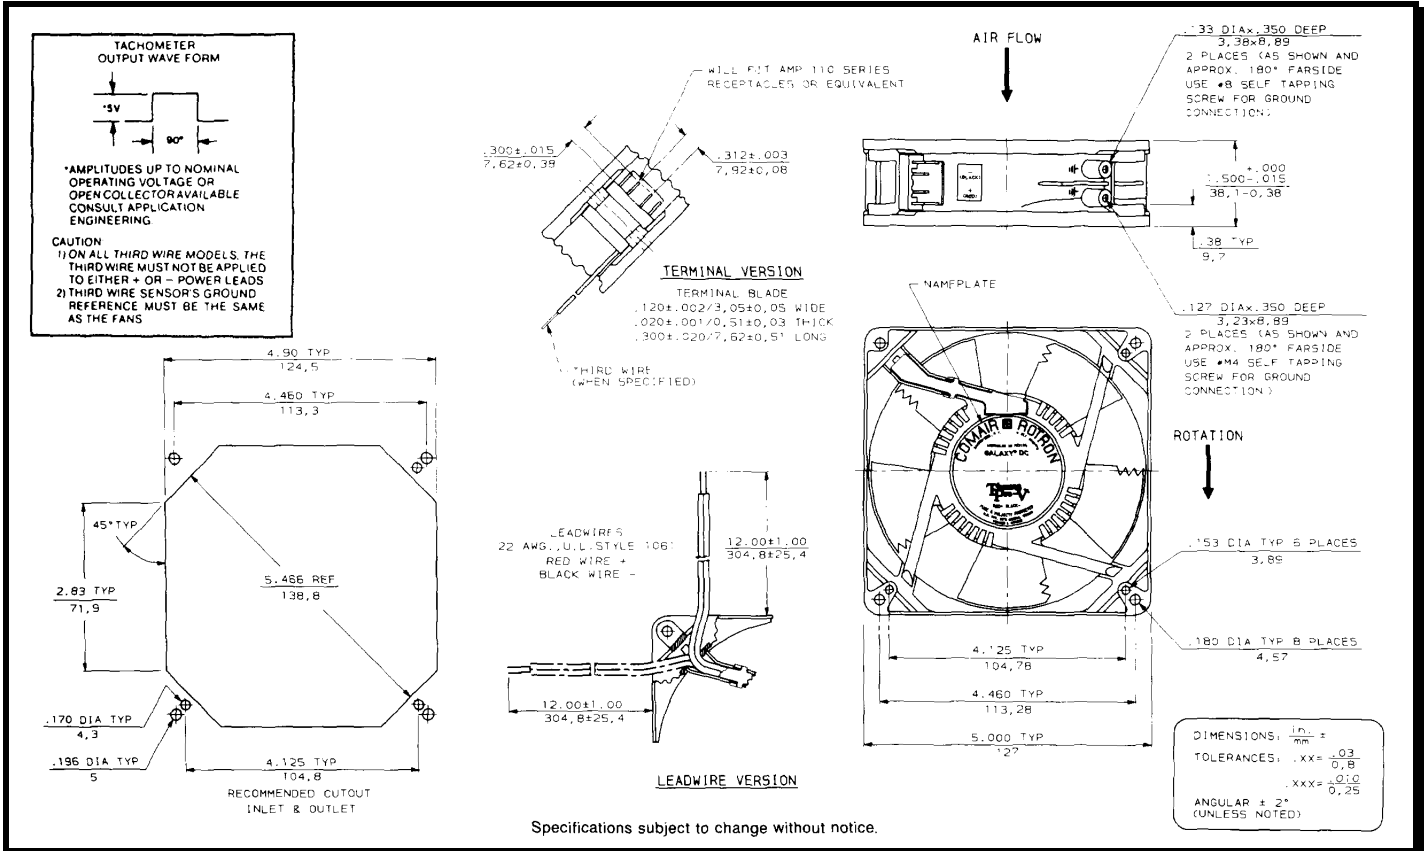

### Motor:

Nominal Voltage	= 24 vdc
Operating Voltage Range	= 12 - 28 vdc
Nominal Running Current	= 0.95 amps
Locked Rotor Current	= 2.00 amps
Running Power	= 22.8 watts
Average Speed	= 3900 RPM
Bearings	= Ball
Air Flow	= 175 CFM
Acoustic	= 57.9 dBA

### Construction:

Venturi: Die Cast Aluminum, Black  
 Propeller: Plastic, Black, UL 94V-0

### Life Expectancy:

This fan is designed for continuous duty life of 60,000 hours at 70°C.

### Additional Features:

Brushless DC Motor  
 Electronic Locked Rotor Protection  
 Polarity Protected  
 Automatic Restart Capability  
 Operating Temp: -10°C to 70°C  
 Storage Temp: -40°C to 85°C

### Agency Approvals:

UL, CUL, CE

### Termination:

12" Lead Wires, 22AWG, UL1601  
 Red = Power(+)  
 Black = Power(-)

**PQ Curve:**

