

SPECIFICATIONS


RoHS Compliant



Model Number: GL24Z3
Part Number: 19039773A

Rev: 01
Sep. 21, 2017

Mechanical Drawing:

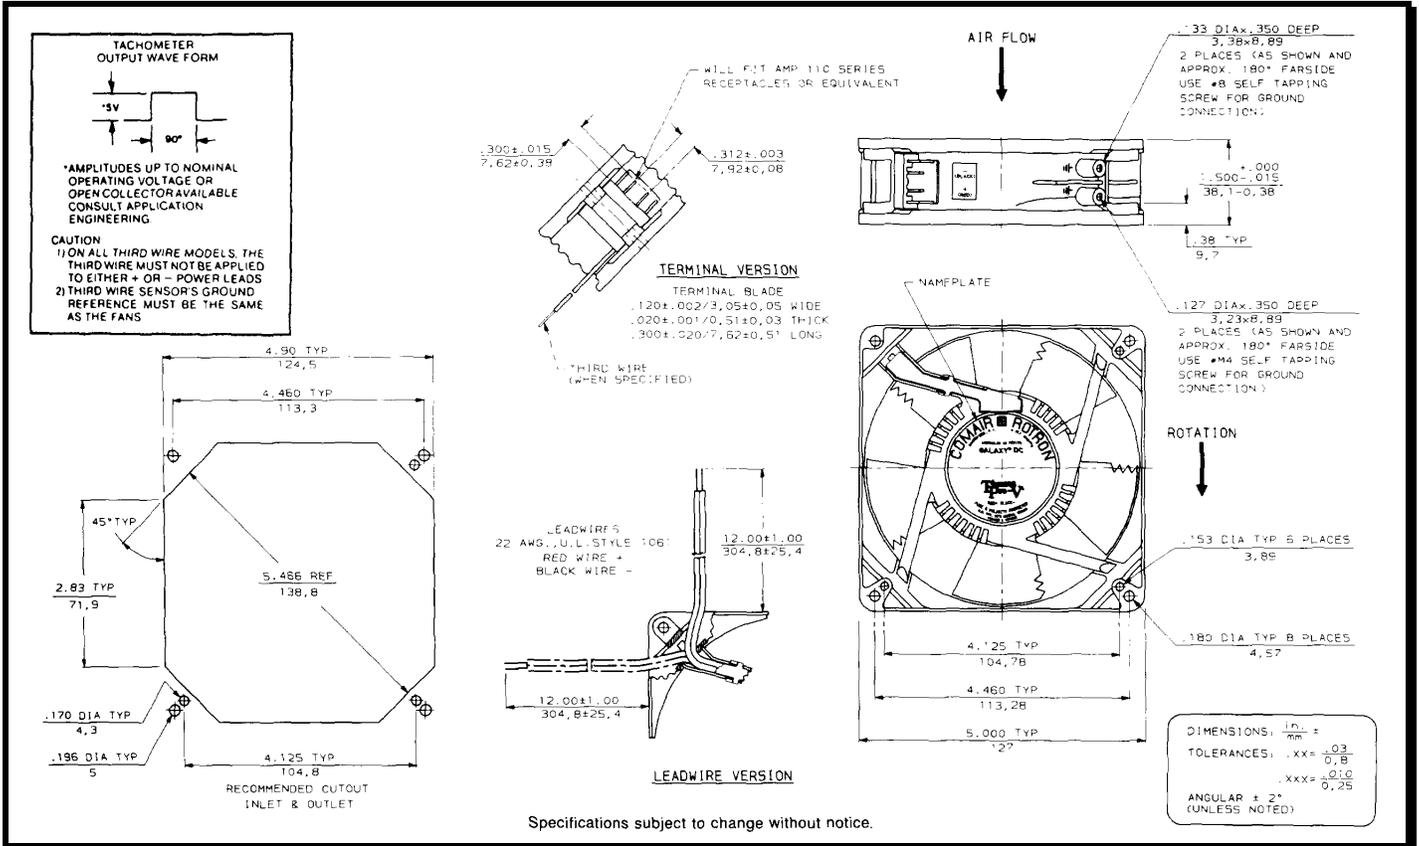

Motor:

Nominal Voltage	= 24 vdc
Operating Voltage Range	= 12 - 28 vdc
Nominal Running Current	= 1.30 amps
Locked Rotor Current	= 3.50 amps
Running Power	= 31.2 watts
Average Speed	= 4100 RPM
Bearings	= Ball
Air Flow	= 192 cfm
Acoustic	= 59.4 dBA

Construction:

Venturi: Die cast Aluminum alloy, painted black.
 Propeller: Plastic black, UL 94V-0.

Life Expectancy:

This fan is designed for continuous duty life of 60,000 hours at 70°C.

Additional Features:

Brushless DC Motor
 Locked Rotor Protection
 Reverse Polarity Protected
 Operating Temperature: -10°C to 70°C
 Storage Temperature: -40°C to 85°C

Termination:

12"±1" Lead wires, 22 AWG, UL 1061
 Red - Power
 Black - Return

Agency Approvals:

UL, CUL, CE

PQ Curve:

