
# **SPECIFICATIONS**

**RoHS** 

**Model Number**: CR17023HA2BMT Version: 00 **Part Number**:17002093A Sep 01, 2023



## **Mechanical Drawing:**

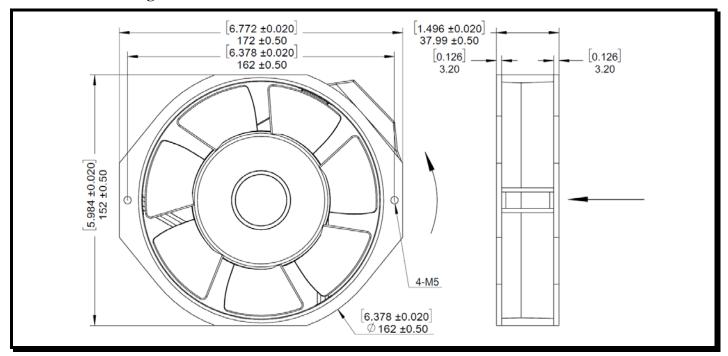

# Motor:

Normal Voltage = 220/240 VACOperating Voltage Range  $= 198 \sim 264 \text{VAC}$ Operating Frequency = 50/60 HzRated Current = 0.13/0.12 AInput Power = 27/26 WattAverage Speed = 2800/3300 RPM

Bearings = Ball

Airflow = 130/154CFM

(Measuring at zero static pressure)

Static Pressure = 0.40/0.54''  $H_2O$ 

(Measuring at zero air flow)

Noise Level = 57/61 dB(A)Net Weight = 700 gram.

#### **Construction:**

Venturi: High quality magnesium alloy die-casting frame

with ED coating and powder coating, Black. Propeller: Magnesium alloy ED coating and painting.

#### Life Expectancy:

This fan is designed for continuous duty life of 50,000 hours at 40°C.

### **Additional Features:**

Insulation Resistance:  $100M\Omega$  or more at 500 V megger. Dielectric strength: 2 seconds at 1800 VAC/ 50-60 Hz. Thermal Shock: Test per MIL-STD-202F, method 107G, condition D.

Operating Temperature: -10°C to 70°C Storage Temperature: -40°C to 85°C

#### **Termination:**

0.120" Wide Terminals

# **Agency Approvals:**

UL, CE

# **PQ** Curve:

