SPECIFICATIONS


(RoHS Compliant)

 Model Number:
 CR9225-XD24BPL
 Version: 00

 Part Number:
 17002058A
 Aug 30, 2023



Mechanical Drawing:

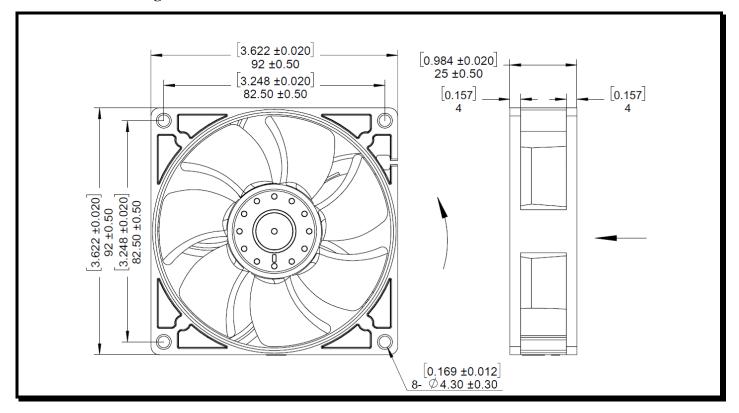

Motor:

Nominal Voltage = 24 vdcOperating Voltage Range = 21.6 - 26.4 vdcNominal Running Current = 0.30amps Max. Locked Rotor Current = 0.60 ampsRunning Power = 7.20 watts Average Speed = 5500 RPMBearings = Ball Air Flow = 87.9 CFMAcoustic $= 58 \, \mathrm{dBA}$ Weight = 100g

Construction:

Venturi: Plastic, Black, UL 94V-0 Propeller: Plastic, Black, UL 94V-0

Life Expectancy:

This fan is designed for continuous duty life of 50,000 hours at $40^{\circ}\mathrm{C}$.

Additional Features:

Brushless DC Motor Automatic Restart Capability Electronic Locked Rotor Protection

Polarity Protected

Operating Temperature: -10°C to 70°C Storage Temperature: -40°C to 85°C

Agencies:

UL,CE

Termination:

250±10mm, 24AWG UL1007 Leadwires

Red = Power(+) Black = Return(-)

PQ Curve:

