
## **SPECIFICATIONS**

Model Number:CLE2L2Version: 03Part Number:19020188ASep 29, 2021



## **Mechanical Drawing:**

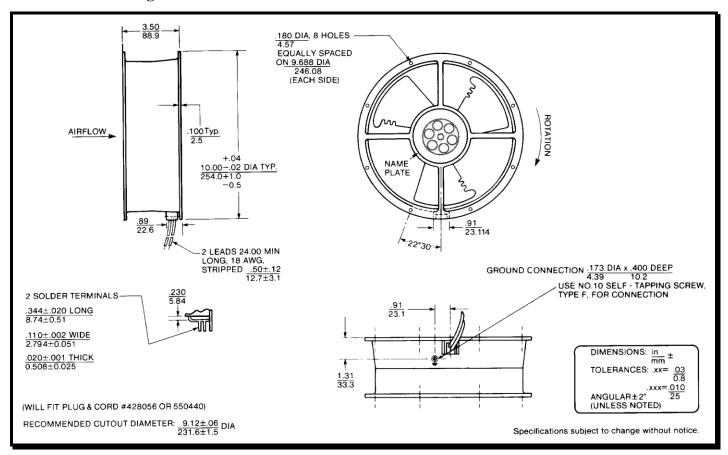

#### **Motor:**

Nominal Voltage = 115 VACFrequency = 50 / 60 Hz

Nominal Running Current = 0.48 / 0.50 Amps

 $\begin{array}{ll} \text{Max. Locked Rotor Current} &= 0.70 \text{ amps} \\ \text{Running Power} &= 67/61 \text{ Watts} \\ \text{Average Speed} &= 1400 / 1650 \text{ RPM} \\ \end{array}$ 

Bearings = Ball

Air Flow = 455 / 550 CFM Acoustic: = 45.2 / 49.2 dBA

#### **Construction:**

Venturi: Aluminum, Black.

Propeller: Plastic, Black, UL 94V-0

### **Life Expectancy:**

This fan is designed for continuous duty life of 46,000

hours at 70°C.

### **Additional Features:**

Permanent Split Capacitor Motor Automatic Reset Thermal Protector

Feathered Edge Propeller

Operating Temperature: -10°C to 70°C Storage Temperature: -40°C to 85°C

#### **Termination:**

24" Lead wires, 18 AWG, UL 1015

## **Agency Approvals:**

UL, CUL, CE

# **PQ** Curve:

