
SPECIFICATIONS

 Model Number:
 MC48K3
 Rev:01

 Part Number:
 19031792A
 Sep 22, 2017



Mechanical Drawing:

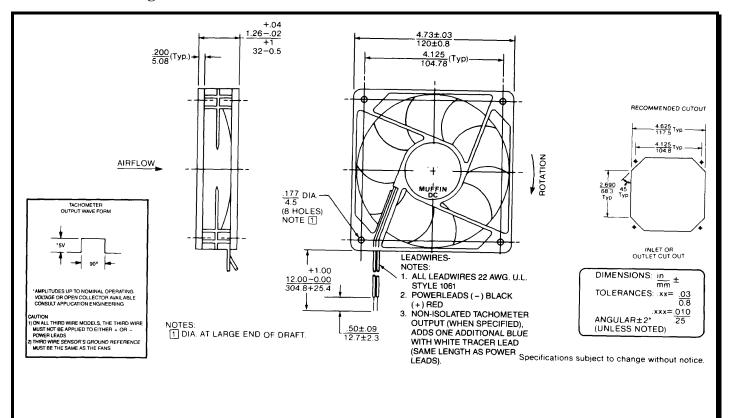

Motor:

Nominal Voltage =48 vdcOperating Voltage Range = 24 - 56 vdcNominal Running Current = 0.22amps Max. Locked Rotor Current = 1.00 amps **Running Power** = 10.6 watts Average Speed =4100**Bearings** = BallAir Flow = 110 CFMAcoustic $= 50.0 \, dBA$

Construction:

Venturi: Lexan 500, Black, UL 94V-0 Propeller: Plastic, Black, UL 94V-0

Life Expectancy:

This fan is designed for continuous duty life of 45,000

hours at 70°C.

Additional Information:

Brushless DC Motor Polarity Protected

Electronic Locked Rotor Protection

Automatic Restart Capability

Operating Temperature: -10° C to 70°C Storage Temperature: -40°C to 85°C

Termination:

12" Lead wires, 22 AWG, UL 1061

Red - Power (+) Black - Return (-)

Agency Approvals:

UL, CUL, CE

PQ Curve:

