
SPECIFICATIONS

 Model Number:
 MD48B1
 Version:01

 Part Number:
 19028867A
 Jan. 08, 2017



Mechanical Drawing:

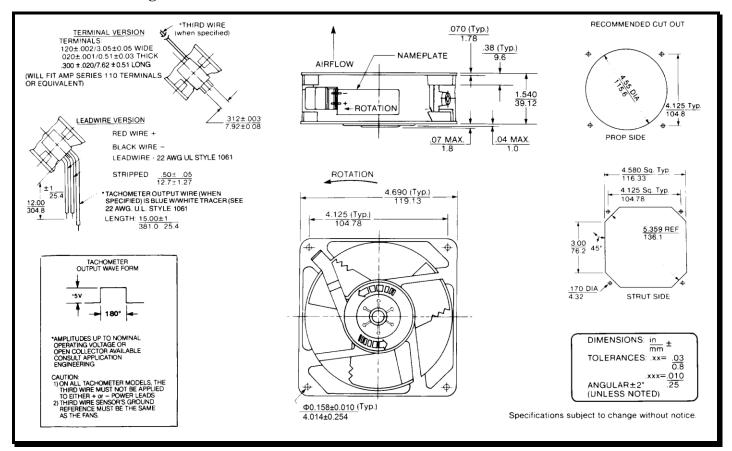

Motor:

Nominal Voltage =48 vdcOperating Voltage Range = 24 - 56 vdcNominal Running Current = 0.12 amps Locked Rotor Current = 0.50 amps**Running Power** = 5.8 watts Average Speed = 3100 rpm**Bearings** = BallAir Flow = 106 CFMAcoustic $= 50 \, \mathrm{dBA}$

Construction:

Venturi: Die-Cast Aluminum, Black Propeller: Plastic, Black, UL 94V-0

Life Expectancy:

This fan is designed for continuous duty life of 55,000 hours at 70°C.

Additional Features:

Brushless DC Motor

Electronic Locked Rotor Protection

Automatic Restart Capability

Polarity Protected

Operating Temperature -10°C to 70°C Storage Temperature -40°C to 85°C

Termination:

12" Lead wires, AWG 22, UL 1061

Red – Fan Power (+) Black - Fan Ground (-)

Agency Approvals:

UL, CUL, CE

PQ Curve:

