
SPECIFICATIONS

 Model Number:
 PT2B3
 Version: 02

 Part Number:
 19028254A
 Nov 2, 2020



Mechanical Drawing:

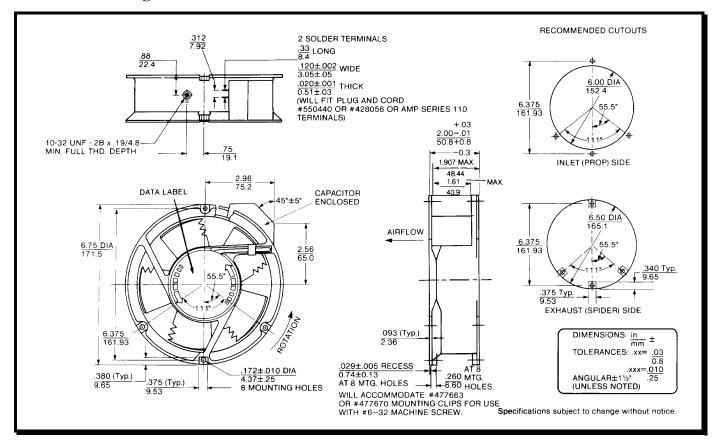

Motor:

Nominal Voltage = 115 VAC Frequency = 50 / 60 Hz

Nominal Running Current = 0.270 / 0.260 amps

 $\begin{array}{ll} \text{Max. Locked Rotor Current} &= 0.49 \text{ amps} \\ \text{Running Power} &= 30 \, / \, 31 \text{ watts} \\ \text{Average Speed} &= 2880 \, / \, 3350 \text{ RPM} \end{array}$

Bearings = Ball

Air Flow = 200 / 235 CFMAcoustic = 50.3 / 54.0 dBA

Construction:

Venturi: Single Piece Die Cast Aluminum, Black.

Propeller: Plastic, Black, UL 94V-0

Life Expectancy:

This fan is designed for continuous duty life of 62,000

hours at 40°C.

Additional Features:

Permanent Split Capacitor Motor

Thermal Protection

Automatic Restart Capability

Operating Temperature: -10°C to 70°C Storage Temperature: -40°C to 85°C

Additional Features:

2x 0.120" Terminals

Agency Approvals:

UL, CUL, CE

PQ Curve:

