
SPECIFICATIONS

Model Number: Part Number:

SPD48B1 19032196A Version: 01 April 28, 2016



Mechanical Drawing:

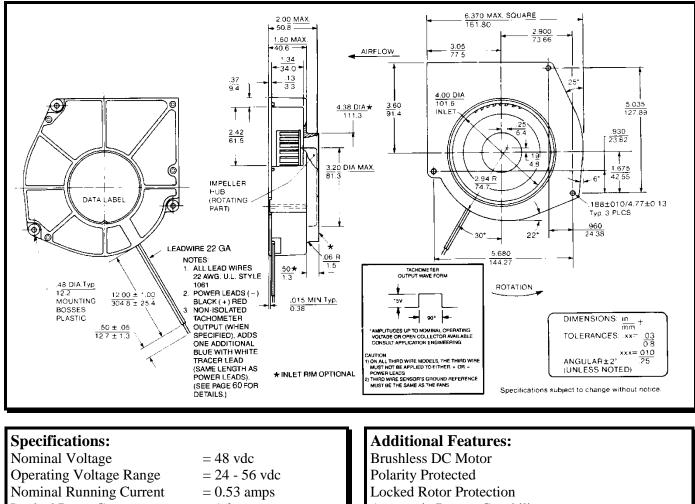

Nominal Running Current= 0.53 ampsLocked Rotor Current= 1.0 ampsRunning Power= 25.4 wattsAverage Speed= 2500 rpmBearings= BallAir Flow= 59 CFMAcoustic= 57.0 dBA

Construction:

Back plate: Die-Cast Zinc Alloy Housing & Propeller: Plastic, Black, UL 94V-0

Life Expectancy:

This fan is designed for continuous duty life of 45,000 hours at 70°C.

Polarity Protected Locked Rotor Protection Automatic Restart Capability Operating Temperature: -10°C to 70°C Storage Temperature: -40°C to 85°C

Termination:

12" lead wires, AWG 22, UL 1061 Red: = Power (+) Black: = Return (-)

Agency Approvals: UL, CUL, CE

PQ Curve:

